






Technical Specifications

Specification	Description
Nominal Pressure	16bar
Bursting Pressure	48bar
Vacuum Pressure	86.7kPa
Working Temperature	-10°C ≤ T ≤ 120°C
Working Medium	Water
Deflection Angle	(α1 + α2) = 45°
Threaded Standard	BS EN 10226-1 (ISO 7)

Materials

No.	Part	Material
1	Body	EPDM
2	Lining	Nylon Cord Fabric
3	Frame	Hard Steel Wire
4	Union	Malleable Iron or Steel

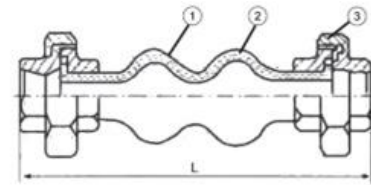

Dimensions (mm)

DN	L	Axial Displacement		Lateral Displacement
		Stretch	Compression	
15	200	5-6	22	22
20	200	5-6	22	22
25	200	5-6	22	22
32	200	5-6	22	22
40	200	5-6	22	22
50	200	5-6	22	22